


HOPPER ENGINEERING ASSOCIATES

4'X8' STEELDECK® PLATFORM EVALUATION

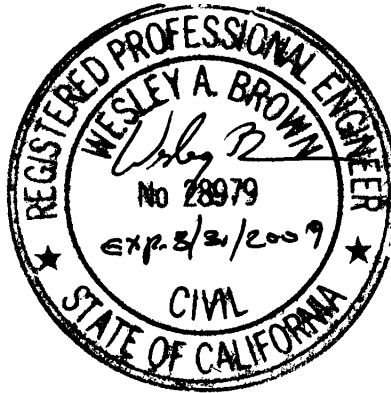

Prepared for: Steeldeck, Inc.
3339 Exposition Place
Los Angeles, CA 90018

Prepared by: Hopper Engineering Associates
300 Vista Del Mar
Redondo Beach, CA 90277


January 2007

Revision 1, April 2007

PRO 196

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/18/07 **PAGE:** ib 
SUBJECT: TABLE OF CONTENTS **BY:** SPB **CK:** WDB **SHT:** ib **OF:** i

Revision 1:

Prepared by: Scott Bauer 4/5/07
Scott Bauer Date

Reviewed by: Wesley B April 5, 2007
Wes Brown Date

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/18/07 **PAGE:** 1
SUBJECT: 1.0 INTRODUCTION **BY:** SPB **CK:** UDB **SHT:** 1 **OF:** 1

1

1.1 Problem Statement

The purpose of this calculation package is to evaluate a 4'x8' Steeldeck® platform for a UBC [1] stage live load of 125 psf and to determine the maximum allowable leg length assuming a lateral seismic load of 0.1g. Wind uplift will also be evaluated.

1

1.2 Analysis Approach

The plywood decking is analyzed using hand calculations only. The steel truss girders are analyzed using the structural analysis program STAAD [4], with much of the input determined by hand calculations. The pipe legs are analyzed using hand calculations based on loads provided by the STAAD output.

1.3 Results Summary

The plywood deck, steel truss girders, and pipe legs are capable of supporting a live load of 125 psf. Under both compressive and lateral seismic loads, the maximum allowed unbraced length of pipe leg is 6'-0". In order to prevent uplift, the maximum allowed wind speed is 40 mph.

1

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/22/07 **PAGE:** 2A
SUBJECT: 2.0 SYSTEM DESCRIPTION **BY:** SPB **CK:** UAB **SHT:** 1A OF 2

Refer to Figures 2.1 – 2.2 for drawings of the 4'x8' Platform. These details are from the full size drawings [6]. All platform details are provided by Steeldeck, Inc. [5]. Multiple 4'x8' panels can be joined together to form large platforms.


Each platform panel is composed of a layer of $\frac{3}{4}$ " MDO plywood fixed to a welded steel frame below by a total of fifteen #14 screws spaced at 24" on center. There are two 8' long and two 4' long trusses forming the perimeter of the frame. An 8' long truss spans across the center of the platform in the long direction, and two separate 2' long trusses span across the center of the platform in the short direction. These central trusses are welded to each other at their point of intersection. The total 4'x8' platform depth is 7" and weighs approximately 160 pounds.

The top chord of the trusses is composed of a $\frac{3}{4}$ " x 1-1/2" x 16 ga. ASTM A-513 steel tube. The bottom chord of the trusses is composed of a $\frac{3}{4}$ " x $\frac{3}{4}$ " x 14 ga. ASTM A-513 steel tube. The truss web is composed of a 5/16" diameter steel rod (A36 steel) bent in a serpentine shape. The clear distance between the top and bottom chords is 3-1/2". The total depth of the steel truss is 5-3/4", and the depth of the frame and plywood is 6-1/2".

The four corners of the platform consist of 7" long 2.36" x 2.36" x 0.158" steel tube corner post pockets that can receive the pipe legs. The pipe legs are 1-1/2" diameter Schedule 40 (A53 Gr. B) steel pipes that vary in length from 8" to 12'-0". In a multi-panel platform, there is only one pipe leg at the corner intersections, meaning that a single pipe leg will be supporting the corners of four platforms. The other three platforms are attached to the single pipe leg by means of a clamped coupler. Coupler

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/22/07 **PAGE:** 2B 
SUBJECT: 2.0 SYSTEM DESCRIPTION **BY:** SPB **CK:** WPB **SHT:** 1B OF 2

is outside the scope of this analysis. Bracing for the pipe legs is typically provided when the height of the platform is 4' or higher.

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION DATE: 1/22/07 PAGE: 3

SUBJECT: 2.0 SYSTEM DESCRIPTION BY: SPB CK: *UAB* SHT: 2 OF 2

In a multi-panel configuration, the 4'x8' panels are attached to each other with two 10 mm cap screws on each of the four sides. The perimeter of the finished deck can be fitted with a 44" high steel guardrail attached to the perimeter truss by a bolt-on clamp plate.

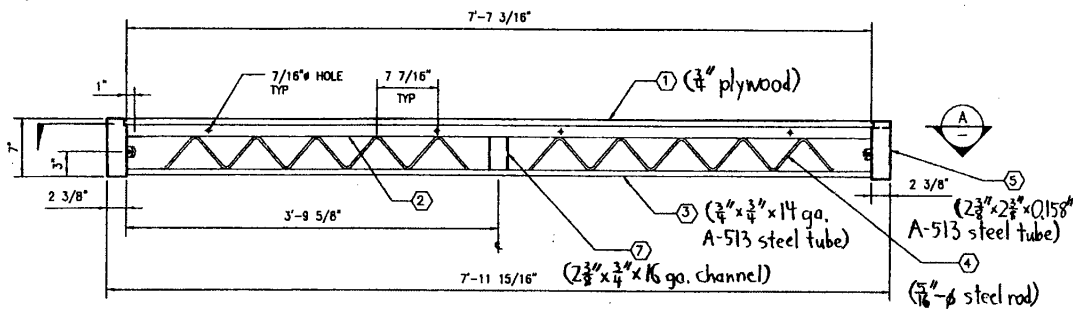


FIGURE 21 - ELEVATION

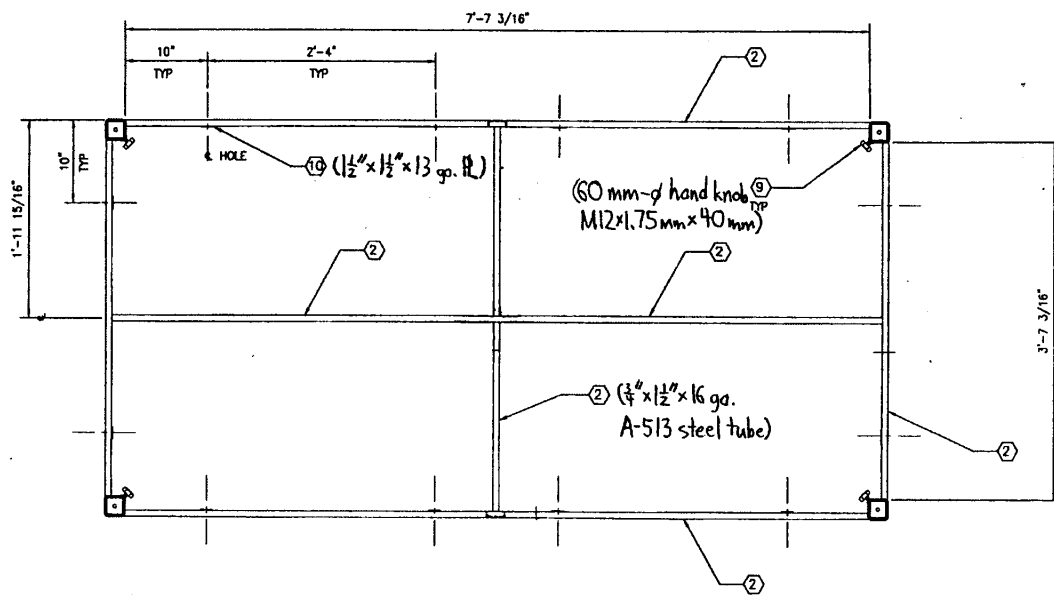


FIGURE 22 - SECTION

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/22/07 **PAGE:** 4
SUBJECT: 3.0 ANALYSIS APPROACH **BY:** SPB **CK:** WDB **SHT:** 1 **OF:** 1

1

The plywood is analyzed by hand as a rectangular plate using the plate stress formulas [3].

The steel trusses are analyzed as a composite section comprising the steel truss frame and the effective width of the plywood deck. All of the relevant section properties are calculated by hand and inputted into the structural analysis program STAAD [4]. The live load placed on each member is proportional to the tributary width of the member, which varies along the length of the member. The overall uniform live load is 125 psf [1].

The pipe legs are analyzed by hand using loads provided by the STAAD output. The longest and therefore most critical pipe leg is 12'-0", so the analysis will begin at this length. The pipe leg will be analyzed assuming that there is no lateral bracing in order to determine the maximum allowable unbraced length of pipe leg. Two load cases will be used: first with both compression due to vertical loads and bending due to lateral seismic loads, and then with compression only. Since the platforms are temporary structures with limited exposure, the seismic loading used is 0.1 x dead load. The structure is also checked for uplift caused by wind pressures.

Analysis of the base plates and soil bearing pressures is beyond the scope of this calculation package.

Steel design is per the AISC Steel Manual [2]. ASTM A-513 "as welded" steel grade 1010 has a yield stress of 32 ksi. A36 steel has a yield stress of 36 ksi. A53 Gr. B steel has a yield stress of 35 ksi.

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 12/19/06 PAGE: 5
SUBJECT: 4.0 Analysis BY: SPB CK: WAB SHT: 1 OF 12

4.1 Plywood Analysis

The deck consists of one layer of $\frac{3}{4}$ " plywood. This essentially forms a plate of dimensions 2'x4' with fixed edges.

$$\sigma_{\max} = \frac{-\beta_1 q b^2}{t^2} \quad [3, \text{page 508, case 8A}]$$

$$\beta_1 = 0.4974 \text{ for } a/b = 2$$

$$b = 24"$$

$$t = \frac{3}{4}"$$

$$q = 125 \text{ psf} + 35 \frac{\text{lb}}{\text{ft}^3} \times \frac{0.75"}{12} = 127.19 \text{ psf} = 0.883 \text{ psi}$$

$$\sigma_{\max} = \frac{(-0.4974)(0.883 \text{ psi})(24")^2}{(\frac{3}{4}")^2} = 449.9 \text{ psi}$$

$$F'_b = 1000 \text{ psi} \times 1.0 = 1000 \text{ psi} > 449.9 \text{ psi} \quad \text{ok}$$

↑ Douglas Fir Construction Grade [7]

$$\text{psf. max. allow} = \frac{1000}{449.9} \times 125 \text{ psf} = \underline{278 \text{ psf}}$$


HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 12/19/06 PAGE: 6
 SUBJECT: 4.0 Analysis BY: SPB CK: UDB SHT: 2 OF 12

1

4.2 Truss Analysis

Analyze truss as a composite section with the plywood deck.

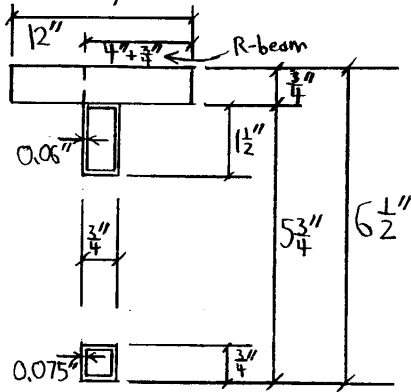

$$\left. \begin{aligned} b_{\text{flange}} &\leq \frac{1}{4} \times L = \frac{1}{4} \times 4' = 1' = 12'' \\ b_{\text{web}} &\leq 8 \times t = 8 \times \frac{3}{4}'' = 6'' \\ &\leq \frac{1}{2} \times \text{spacing} \approx \frac{1}{2} \times 2' = 1' = 12'' \end{aligned} \right\} \text{for T-beam}$$

$$\left. \begin{aligned} b_{\text{web}} &\leq \frac{1}{12} \times L = \frac{1}{12} \times 4' = \frac{1}{3}' = 4'' \\ &\leq 6 \times t = 6 \times \frac{3}{4}'' = 4\frac{1}{2}'' \\ &\leq \frac{1}{2} \times \text{spacing} \approx \frac{1}{2} \times 2' = 1' = 12'' \end{aligned} \right\} \text{for R-beam}$$

T-beam:

$$b_{\text{flange}} = 12'' \times \frac{1500 \text{ ksi}}{29000 \text{ ksi}} = 0.62'' \text{ (as steel)}$$

$$A_x = 0.62'' \times 0.75'' + (1.5'' \times 0.75'' - 1.38'' \times 0.63'') + (0.75'' \times 0.75'' - 0.6'' \times 0.6'')$$

$$= 0.465 + 0.2556 + 0.2025 \text{ in}^2 = 0.9231 \text{ in}^2$$

$$A_y = 0.62'' \times 0.75'' + 2 \times 1.5'' \times 0.06'' + 2 \times 0.75'' \times 0.075'' = 0.7575 \text{ in}^2$$

$$A_z = 2 \times 0.75'' \times 0.06'' + 2 \times 0.75'' \times 0.075'' = 0.2025 \text{ in}^2$$

$$Y_b = 6.5''$$

$$Z_p = 0.75''$$

$$\bar{y} = \frac{\sum A_y}{\sum A} = \frac{0.465 \text{ in}^2 \times 6.125'' + 0.2556 \text{ in}^2 \times 5'' + 0.2025 \text{ in}^2 \times 0.375''}{0.9231 \text{ in}^2} = \frac{4.202 \text{ in}^3}{0.9231 \text{ in}^2} = 4.552''$$

$$I_z = \frac{(0.62'' \times 0.75'')^3}{12} + (0.465 \text{ in}^2)(6.125'' - 4.552'')^2 + \frac{(0.75'')(1.5'')^3}{12} - \frac{(0.63'')(1.38'')^3}{12}$$

$$+ (0.2556 \text{ in}^2)(5'' - 4.552'')^2 + \frac{(0.75'')^4}{12} - \frac{(0.6'')^4}{12} + (0.2025 \text{ in}^2)(4.552'' - 0.375'')^2$$

$$= 0.021797 + 1.150563 + 0.210938 - 0.137974 + 0.051300$$

$$+ 0.026367 - 0.010800 + 3.533084 \text{ in}^4 = 4.845 \text{ in}^4$$

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 12/27/06 PAGE: 7
 SUBJECT: 4.0 Analysis BY: SPB CK: UBB SHT: 3 OF 12

$$I_y = \frac{(0.75'')(0.62'')^3}{12} + \frac{(1.5'')(0.75'')^3}{12} - \frac{(1.38'')(0.63'')^3}{12} + \frac{(0.75'')^4}{12} - \frac{(0.6'')^4}{12}$$

$$= 0.014896 + 0.052734 - 0.028755 + 0.026367 - 0.010800 \text{ in}^4$$

$$= 0.054 \text{ in}^4$$

$$I_x \approx 1.0 \text{ in}^4$$

R-beam:

$$b_{\text{flange}} = 4.75'' \times \frac{1500 \text{ ksi}}{24000 \text{ ksi}} = 0.25'' \text{ (as steel)}$$

$$A_x = 0.25'' \times 0.75'' + 0.2556 + 0.2025 \text{ in}^2 = 0.6456 \text{ in}^2$$

$$A_y = 0.25'' \times 0.75'' + 2 \times 1.5'' \times 0.06'' + 2 \times 0.75'' \times 0.075'' = 0.48 \text{ in}^2$$

$$A_z = 0.2025 \text{ in}^2$$

$$Y_o = 6.5''$$

$$Z_o = 0.75''$$

$$\bar{y} = \frac{\sum A_y}{\sum A} = \frac{0.1875 \text{ in}^2 \times 6.125'' + 0.2556 \text{ in}^2 \times 5'' + 0.2025 \text{ in}^2 \times 0.375''}{0.6456 \text{ in}^2} = \frac{2.502 \text{ in}^3}{0.6456 \text{ in}^2} = 3.876''$$

$$I_z = \frac{(0.25'')(0.75'')^3}{12} + (0.1875 \text{ in}^2)(6.125'' - 3.876'')^2 + \frac{(0.75'')(1.5'')^3}{12} - \frac{(0.63'')(1.38'')^3}{12}$$

$$+ (0.2556 \text{ in}^2)(5'' - 3.876'')^2 + \frac{(0.75'')^4}{12} - \frac{(0.6'')^4}{12} + (0.2025 \text{ in}^2)(3.876'' - 0.375'')^2$$

$$= 0.008789 + 0.948375 + 0.210938 - 0.137974 + 0.322919$$

$$+ 0.026367 - 0.010800 + 2.482043 \text{ in}^4 = 3.851 \text{ in}^4$$

$$I_y = \frac{(0.75'')(0.25'')^3}{12} + 0.052734 - 0.028755 + 0.026367 - 0.010800 \text{ in}^4$$

$$= 0.000977 + 0.052734 - 0.028755 + 0.026367 - 0.010800 \text{ in}^4$$

$$= 0.041 \text{ in}^4$$

$$I_x \approx 1.0 \text{ in}^4$$

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' Steeldeck[®] Platform Evaluation DATE: 12/28/06 PAGE: 8
 SUBJECT: 4.0 Analysis BY: SPB CK: WDB SHT: 4 OF 12

1

These sections will be inputted into STAAD as User-Defined General Sections. This type of section requires additional cross-sectional properties.

T-beam:

$$D = Y_o = 6.5''$$

$$TD = \frac{2 \times 0.06'' + 2 \times 0.075''}{2} = 0.135''$$

$$B = 0.75''$$

$$TB = 0.135''$$

$$S_z = \frac{I_z}{\bar{y}} = \frac{4.845 \text{ in}^4}{4.552''} = 1.064 \text{ in}^3 \text{ (minimum)}$$

$$S_y = \frac{I_y}{\bar{z}} = \frac{0.054 \text{ in}^4}{0.75''/2} = 0.144 \text{ in}^3$$

$$P_z = P_y = HSS = DEE = 0$$

R-beam:

$$D = Y_o = 6.5''$$

$$TD = 0.135''$$

$$B = 0.75''$$

$$TB = 0.135''$$

$$S_z = \frac{I_z}{\bar{y}} = \frac{3.851 \text{ in}^4}{3.876''} = 0.994 \text{ in}^3 \text{ (minimum)}$$

$$S_y = \frac{I_y}{\bar{z}} = \frac{0.041 \text{ in}^4}{0.75''/2} = 0.109 \text{ in}^3$$

$$P_z = P_y = HSS = DEE = 0$$

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck[®] Platform Evaluation DATE: 12/28/06 PAGE: 9
SUBJECT: 4.0 Analysis BY: SPB CK: UDB SHT: 5 OF 12

Selfweight:

Inner beams (I-beams):

$$\text{Plywood: } 35 \frac{\text{lb}}{\text{ft}^2} \times \frac{0.75''}{12} \times 2' = 4.375 \text{ plf}$$

$$\text{Upper chord: } 490 \frac{\text{lb}}{\text{ft}^2} \times \frac{0.2556 \text{ in}^2}{144} = 0.870 \text{ plf}$$

$$\text{Lower chord: } 490 \frac{\text{lb}}{\text{ft}^2} \times \frac{0.2025 \text{ in}^2}{144} = 0.689 \text{ plf}$$

Truss web: $\frac{5''}{16}$ ϕ steel rod

$$A = \pi \left(\frac{5''}{16}\right)^2 / 4 = 0.0767 \text{ in}^2$$

$$490 \frac{\text{lb}}{\text{ft}^2} \times \frac{0.0767 \text{ in}^2}{144} \times 1.414 = 0.369 \text{ plf}$$

$$\Rightarrow \text{Total weight} = 6.303 \text{ plf} = 0.00052525 \text{ kip/in}$$

Outer beams (R-beams):

$$\text{Plywood: } 35 \frac{\text{lb}}{\text{ft}^2} \times \frac{0.75''}{12} \times 1' = 2.1875 \text{ plf}$$

$$\text{Upper chord: } 0.870 \text{ plf}$$

$$\text{Lower chord: } 0.689 \text{ plf}$$

$$\text{Truss web: } 0.369 \text{ plf}$$


$$\Rightarrow \text{Total weight} = 4.116 \text{ plf} = 0.00034296 \text{ kip/in}$$

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 12/29/06 PAGE: 10
SUBJECT: 4.0 Analysis BY: SPB CK: UDB SHT: 6 OF 12

Live load:

2'x4' section:



← Tributary areas

Live load = 125 psf

$$W_{1max} = 125 \text{ psf} \times 1' = 125 \text{ plf} = 0.010417 \text{ kip/in}$$

$$W_{1min} = 0 \text{ plf}$$

$$W_{2max} = 125 \text{ psf} \times 1' = 125 \text{ plf} = 0.010417 \text{ kip/in}$$

$$W_{2min} = 0 \text{ plf}$$

See full live load distribution on page A4

See Appendix A for STAAD analysis of Steel Deck beams.

From STAAD, the maximum vertical deflection under a live load of 125 psf is 0.144" (center node)

$$\text{Allowable deflection} = \frac{L}{360} = \frac{\sqrt{96''^2 + 48''^2}}{360} = \frac{107.3''}{360}$$

$$= 0.298'' > 0.144'' \quad \text{ok}$$

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 1/2/07 PAGE: 11
 SUBJECT: 4.0 Analysis BY: SPB CK: UDB SHT: 7 OF 12

From STAAD, $M_{max} = 16.75$ kip-in, $f_{bmax} = 16.7$ ksi

$$F_b = 0.66 \times 32 \text{ ksi} = 21.12 \text{ ksi} > 16.7 \text{ ksi} \quad \text{ok}$$

$$T = C = M/d = 16.75 \text{ kip-in} / (5.75'' - \frac{1.5''}{2} - \frac{0.75''}{2}) = 3.62 \text{ kips}$$

⇒ Compressive stress in top chord:

$$3.62 \text{ kips} / (1.50'' \times 0.75'' - 1.38'' \times 0.63'') = 14.16 \text{ ksi}$$

$$r_{min} = \sqrt{\frac{I}{A}}$$

$$I = \frac{(1.5'' \times 0.75'')^3}{12} - \frac{(1.38'' \times 0.63'')^3}{12} = 0.023979 \text{ in}^4$$

$$A = (1.5'' \times 0.75'') - (1.38'' \times 0.63'') = 0.2556 \text{ in}^2$$

$$r = \sqrt{\frac{0.023979 \text{ in}^4}{0.2556 \text{ in}^2}} = 0.306''$$

$$\frac{KL}{r} = \frac{0.65 \times 24''}{0.306''} = 50.98$$

$$C_c = \sqrt{\frac{2\pi^2 E}{F_y}} = \sqrt{\frac{2\pi^2 (29000 \text{ ksi})}{32 \text{ ksi}}} = 133.75 > 50.98$$

$$\Rightarrow F_e = \frac{[1 - \frac{(KL/r)^2}{2C_c^2}] F_y}{\frac{5}{3} + \frac{3(KL/r)^2 - (KL/r)^3}{8C_c^3}} = \frac{[1 - \frac{5098^2}{2(133.75)^2}] (32 \text{ ksi})}{\frac{5}{3} + \frac{3(5098)^2 - (5098)^3}{8(133.75)^3}}$$

$$= \frac{0.927(32 \text{ ksi})}{\frac{5}{3} + 0.14293 - 0.00692}$$

$$= 16.46 \text{ ksi} > 14.16 \text{ ksi} \quad \text{ok}$$

Check local buckling:

$$\frac{b}{t} = \frac{1.5''}{0.06''} = 25$$

$$\frac{190}{\sqrt{F_y}} = \frac{190}{\sqrt{32}} = 33.6 > 25 \Rightarrow \text{section is compact} \quad \text{ok}$$

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation

DATE: 1/16/07

PAGE: 12

SUBJECT: 4.0 Analysis


BY: SPB

CK: WDB

SHT: 8 OF 12

1

Truss members in web:



$$\theta \approx 45^\circ$$

Web truss members are $\frac{5}{16}$ "- ϕ Steel rods

$$C = 0.73 \text{ kips} / \sin 45^\circ = 1.03 \text{ kips}$$

$$r \approx \frac{d}{4} = \frac{5/16''}{4} = 0.0781''$$

$$L \approx (3.5^2 + 3.5^2)^{1/2} = 4.95''$$

$$K = 0.65 \text{ (fixed-fixed)}$$

$$\frac{KL}{r} = \frac{0.65(4.95'')}{0.0781''} = 41.2$$

$$\Rightarrow F_a = 19.09 \text{ ksi}$$

$$f_a = \frac{P}{A} = \frac{1.03 \text{ kips}}{\pi(5/32'')^2} = 13.43 \text{ ksi}$$

$$\frac{f_a}{F_a} = \frac{13.43}{19.09} = 0.70 < 1.0 \quad \text{ok}$$

Minimum weld required:

$$\frac{(0.73 \text{ kips})(0.707) \times 2}{(0.707 \text{ ksi}) \times \pi \left(\frac{5}{16}''\right)} = 21 \text{ ksi}$$

$$\Rightarrow t > 0.071'' < \frac{1}{8}'' \text{ min. weld}$$

Determine psf max. allowable due to compressive stress in top chord:

$$\frac{21.12 \text{ ksi}}{16.7 \text{ ksi}} \times 125 \text{ psf} = 158 \text{ psf}$$

$$\frac{16.46 \text{ ksi}}{14.16 \text{ ksi}} \times 125 \text{ psf} = 145.3 \text{ psf}$$

} say 145 psf

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 1/16/07 PAGE: 13
 SUBJECT: 4.0 Analysis BY: SPB CK: WDB SHT: 9 OF 12


4.3 Pipe Legs Analysis

From STAAD, the maximum support reaction is:

$$R_y = 1.04 \text{ kips}$$

Legs are $1\frac{1}{2}$ "- ϕ Sch. 40 steel pipe, and their length can vary from 8" to 12'-0".

There is only one leg at a corner where deck frames meet. A corner leg will support the STAAD support reactions. An interior leg, however, will support the vertical support reactions of four deck frames — interior leg controls.

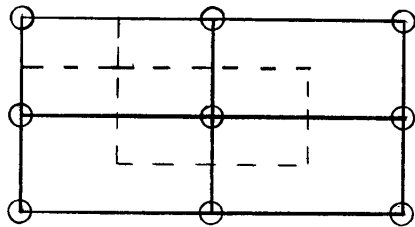

Compression only:

$$P_{max} = 1.04 \text{ k} \times 4 = 4.16 \text{ kips (from STAAD)}$$

$$f_a = \frac{P_{max}}{A} = \frac{4.16 \text{ k}}{0.799 \text{ in}^2} = 5.21 \text{ ksi}$$

$$\text{For } L = 12'-0", \quad \frac{KL}{r} = \frac{(1.0)(12' \times 12)}{0.623"} = 231.1 > 200$$

$$C_c = \sqrt{\frac{2\pi^2 E}{F_y}} = \sqrt{\frac{2\pi^2 (29000 \text{ ksi})}{35 \text{ ksi}}} = 127.9 < \frac{KL}{r}$$

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck® Platform Evaluation DATE: 1/18/07 PAGE: 14
SUBJECT: 4.0 Analysis BY: SPB CK: WDB SHT: 10 OF 12

$$\begin{aligned}\Rightarrow F_o &= \frac{12\pi^2 E}{23(KL/r)^2} \\ &= \frac{12\pi^2(29000 \text{ ksi})}{23(231.1)^2} \\ &= 2.80 \text{ ksi} < 5.21 \text{ ksi} \quad \text{N.G.}\end{aligned}$$

Determine maximum allowable unbraced length

$$\begin{aligned}5.21 \text{ ksi} &= \frac{12\pi^2(29000 \text{ ksi})}{23(KL/r)^2} \\ \frac{KL}{r} &\leq \sqrt{\frac{12\pi^2(29000 \text{ ksi})}{23 \times 5.21 \text{ ksi}}} = 169.3\end{aligned}$$

$$L_{\max} = \frac{169.3 \times 0.623''}{1.0} = 105.5'' = 8' - 9\frac{1}{2}''$$

⇒ Maximum unbraced (both directions) length of pipe leg in pure compression is 8'-0".

Compression and Bending due to lateral seismic loads:

$$P_{\max} = 4.16 \text{ kips}$$

$$\text{Seismic force} = 0.1 \times DL$$

$$\begin{aligned}DL &= [6.303 \text{ plf} \times (8' + 4') + 4.116 \text{ plf} \times (8' \times 2 + 4' \times 2) / 4 \text{ sup.}] \times 4 \text{ frames} \\ &= 174.42 \text{ lb.} = 0.1744 \text{ kips}\end{aligned}$$

$$\text{Seismic force} = 0.1 \times 0.1744 \text{ kips} = 0.0174 \text{ kips}$$

$$\text{For } L = 12'-0'', M_{\max} = 0.0174 \text{ kips} \times 144'' = 2.51 \text{ kip-in}$$

$$F_b = \frac{M_{\max}}{S} = \frac{2.51 \text{ kip-in}}{0.326 \text{ in}^3} = 7.70 \text{ ksi}$$

$$F_b = 0.60 \times F_y = 0.60 \times 35 \text{ ksi} = 21.0 \text{ ksi}$$

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck[®] Platform Evaluation DATE: 1/18/07 PAGE: 15
 SUBJECT: 4.0 Analysis BY: SPB CK: WDB SHT: 11 OF 12

1

Determine maximum allowable unbraced length under both compression and bending:

$$\frac{f_a}{F_a} + \frac{C_m f_b}{(1 - F_a/F_e) F_b} \leq 1.0 \times 1.33$$

$$\frac{f_a}{0.60 F_y} + \frac{f_b}{F_b} \leq 1.0 \times 1.33 \leftarrow \text{seismic factor}$$

$C_m = 0.85$ (sidesway possible)

$$F_e = \frac{12\pi^2 E}{23(KL/r)^2}$$

From before, maximum unbraced length of pipe leg in pure compression is 8'-0".

Try a 12'-long column with an unbraced length of 6'-0":

$$\frac{KL}{r} = \frac{6' \times 12}{0.623"} = 115.6 < 200$$

$$\Rightarrow F_a \approx 10.89 \text{ ksi (Tables C-36, C-50)}$$

$$F_e = \frac{12\pi^2 (29000 \text{ ksi})}{23(115.6)^2} = 11.17 \text{ ksi}$$

$$\frac{5.21 \text{ ksi}}{10.89 \text{ ksi}} + \frac{0.85(7.70 \text{ ksi})}{(1 - 5.21/11.17)(21.0 \text{ ksi})} = 0.478 + 0.584 = 1.06 < 1.33 \quad \text{ok}$$

$$\frac{5.21 \text{ ksi}}{0.60 \times 35 \text{ ksi}} + \frac{7.70 \text{ ksi}}{21.0 \text{ ksi}} = 0.248 + 0.367 = 0.615 < 1.33 \quad \text{ok}$$

HOPPER ENGINEERING ASSOCIATES
CALCULATION SHEET

TITLE: 4'x8' Steeldeck[®] Platform Evaluation DATE: 1/18/07 PAGE: 16
SUBJECT: 4.0 Analysis BY: SPB CK: UDB SHT: 12 OF 12

Try a 12'-long column with an unbraced length of 7'-0":

$$\frac{KL}{r} = \frac{7' \times 12}{0.623"} = 134.8 < 200$$

$$\Rightarrow F_a \approx 8.22 \text{ ksi (Tables C-36, C-50)}$$

$$F_e' = \frac{12\pi^2(29000 \text{ ksi})}{23(134.8)^2} = 8.22 \text{ ksi}$$

$$\frac{5.21 \text{ ksi}}{8.22 \text{ ksi}} + \frac{0.85(7.70 \text{ ksi})}{(1 - 5.21/8.22)(21.0 \text{ ksi})} = 0.634 + 0.851 = 1.49 > 1.33 \quad \text{N.G.}$$

\Rightarrow Maximum unbraced length of pipe leg under both compression and lateral seismic loading is 6'-0".

Check wind load:

There is very little side area for the wind to blow against, so by inspection, seismic forces will govern lateral loads. However, wind-induced uplift is a concern.

$$P = C_e C_q q_s I_w$$

$$C_e = 1.06 \text{ (Exposure } C, < 15')$$

$$C_q = 0.7 \text{ (upward)}$$

$$I_w = 1.0$$

$$q_s = 0.00256 V^2$$

$$P = 1.06 \times 0.7 \times 0.00256 V^2 \times 1.0 = 0.0019 V^2 \text{ psf}$$

$$DL \approx 160 \text{ lb./}(8' \times 4') = 5 \text{ psf}$$

$$\Rightarrow 5 \text{ psf} \geq 1.5 \times 0.0019 V^2$$

$$\Rightarrow V \leq 41.9 \text{ mph} \Rightarrow \text{say } \underline{40 \text{ mph}}$$

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/22/07 **PAGE:** 17
SUBJECT: 5.0 CONCLUSIONS **BY:** SPB **CK:** WDB **SHT:** 1 **OF** 1

1

1

1

The plywood deck, steel truss frame, and pipe legs are capable of supporting a live load of 125 psf. The steel truss frames are analyzed as a composite section consisting of the plywood deck and the steel truss chords. According to the STAAD output, the maximum moment in any of the steel trusses is 16.75 kip-in, which occurs in the central longitudinal truss at its junction with the central transverse trusses. Compression in the top chord and in the web members was checked and found to be acceptable under the specified live load. The maximum deflection under the 125 psf live load is 0.144", which occurs at the intersection of the center spans. This deflection is approximately half of the UBC recommended maximum deflection ($L/745 = \frac{1}{2} \times (\text{UBC } L/360)$).

The 12' long pipe legs are capable of supporting the full live load, but only if lateral bracing is provided. Under pure compression, the maximum allowable unbraced length of pipe leg is 8'-0". Under both compressive and lateral seismic loads, the maximum allowable unbraced length of pipe leg is 6'-0". Lateral seismic loads are 0.1XDL since the structure is temporary. By inspection, lateral seismic loads exceed lateral wind loads. However, uplift due to wind is possible if the wind speed exceeds 40 mph.

HOPPER ENGINEERING ASSOCIATES

CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/22/07 **PAGE:** 18
SUBJECT: 6.0 REFERENCES **BY:** SPB **CK:** HDB **SHT:** 1 **OF:** 1

1

1. International Conference of Building Officials. Uniform Building Code, Volume 2 – Structural Engineering Design Provisions. 1997.
2. American Institute of Steel Construction. Manual of Steel Construction – Allowable Stress Design. 9th Edition. 1989.
3. Warren C. Young; Richard G. Budynas. Roark's Formulas for Stress and Strain. Seventh Edition. 2002.
4. Research Engineers, International. STAAD.Pro 2004.
5. Meeting between HEA and Steel Deck on 12/7/06 with sample 4'x8' steel deck platform.
6. Hopper Engineering Associates drawings.
7. Approved American National Standard (ANSI) and American Forest & Paper Association (AF&PA). National Design Specification (NDS) for Wood Construction – Supplement. 2001 Edition.

HOPPER ENGINEERING ASSOCIATES


CALCULATION SHEET

TITLE: 4'x8' STEELDECK® PLATFORM EVALUATION **DATE:** 1/22/07 **PAGE:** A1
SUBJECT: APPENDIX A **BY:** SPB **CK:** WDB **SHT:** 1 **OF**

| 1

Appendix A – STAAD Output


Node numbers

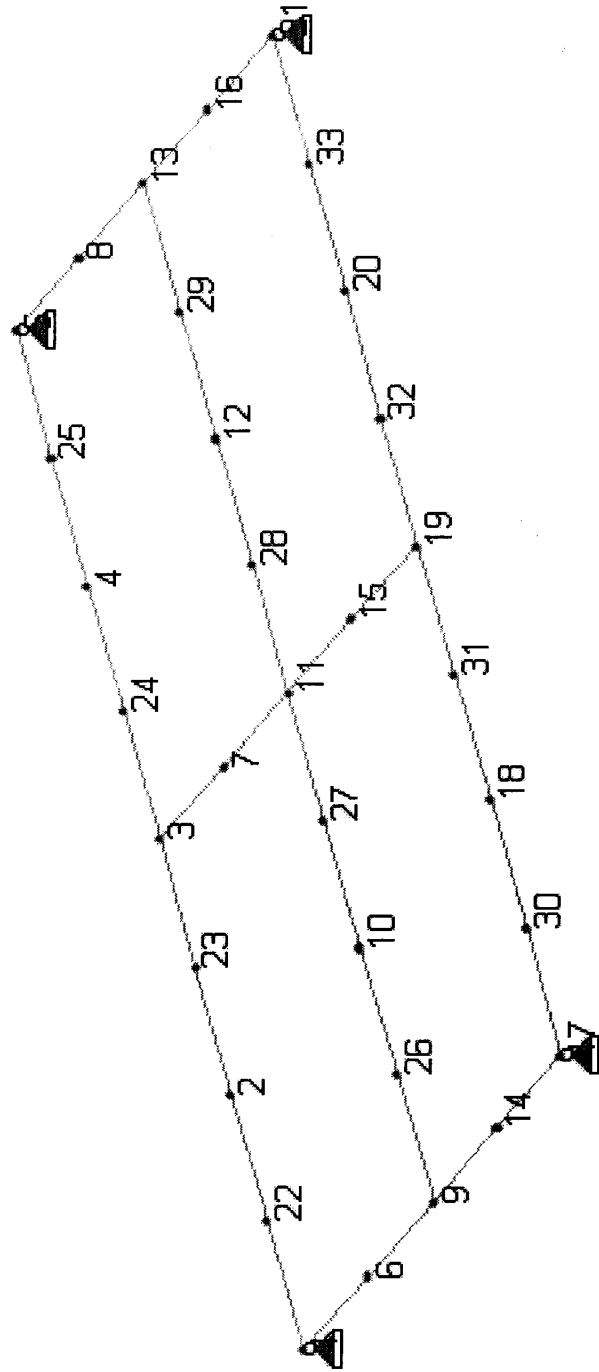

Load 2




Member numbers

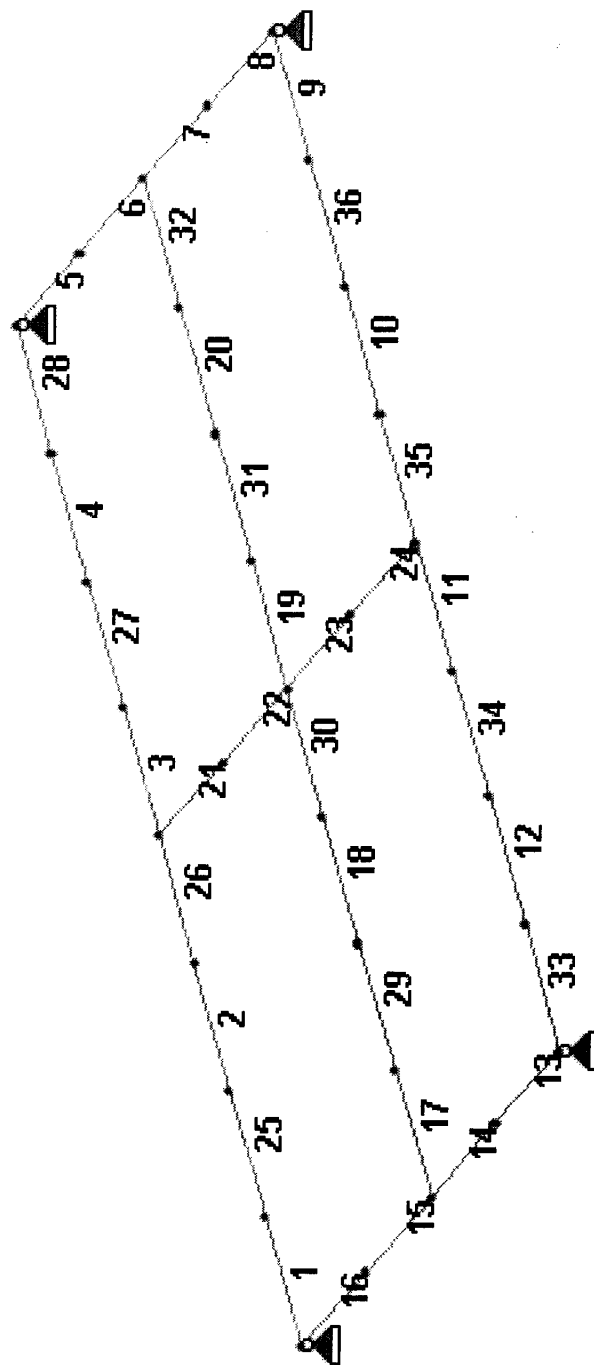

Load 2



Live Load Distribution

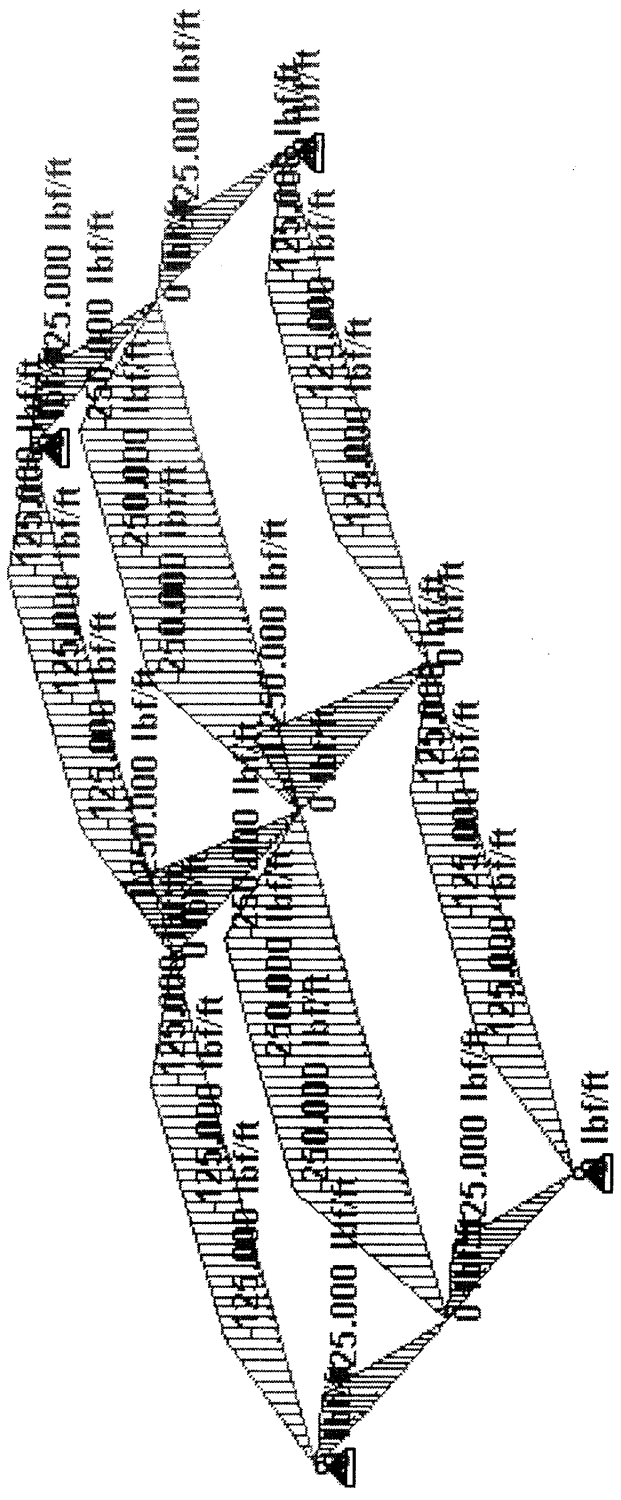

LA

Load 2

```

*****
*
*          STAAD.Pro          *
*      Version 2006   Bld 1002.US   *
*      Proprietary Program of      *
*      Research Engineers, Intl.    *
*      Date=   JAN 22, 2007        *
*      Time=   16:52:22           *
*
*      USER ID: Hopper Engineering Associates
*****

```

```

1. STAAD SPACE
INPUT FILE: SteelDeck.STD
2. START JOB INFORMATION
3. ENGINEER DATE 28-DEC-06
4. END JOB INFORMATION
5. INPUT WIDTH 79
6. UNIT INCHES KIP
7. JOINT COORDINATES
8. 1 0 0 0; 2 24 0 0; 3 48 0 0; 4 72 0 0; 5 96 0 0; 6 0 0 12; 7 48 0 12
9. 8 96 0 12; 9 0 0 24; 10 24 0 24; 11 48 0 24; 12 72 0 24; 13 96 0 24; 14 0 0 36
10. 15 48 0 36; 16 96 0 36; 17 0 0 48; 18 24 0 48; 19 48 0 48; 20 72 0 48
11. 21 96 0 48; 22 12 0 0; 23 36 0 0; 24 60 0 0; 25 84 0 0; 26 12 0 24; 27 36 0 24
12. 28 60 0 24; 29 84 0 24; 30 12 0 48; 31 36 0 48; 32 60 0 48; 33 84 0 48
13. MEMBER INCIDENCES
14. 1 1 22; 2 2 23; 3 3 24; 4 4 25; 5 5 8; 6 8 13; 7 13 16; 8 16 21; 9 21 33
15. 10 20 32; 11 19 31; 12 18 30; 13 17 14; 14 14 9; 15 9 6; 16 6 1; 17 9 26
16. 18 10 27; 19 11 28; 20 12 29; 21 3 7; 22 7 11; 23 11 15; 24 15 19; 25 22 2
17. 26 23 3; 27 24 4; 28 25 5; 29 26 10; 30 27 11; 31 28 12; 32 29 13; 33 30 17
18. 34 31 18; 35 32 19; 36 33 20
19. START USER TABLE
20. TABLE 1
21. UNIT INCHES KIP
22. GENERAL
23. T-BEAM
24. 0.9231 6.5 0.135 0.75 0.135 4.845 0.054 1 1.064 0.144 0.7575 0.2025 0 0 0 0
25. R-BEAM
26. 0.6456 6.5 0.135 0.75 0.135 3.851 0.041 1 0.994 0.109 0.48 0.2025 0 0 0 0
27. END
28. DEFINE MATERIAL START
29. ISOTROPIC STEEL
30. E 29000
31. POISSON 0.3
32. DENSITY 0.000283
33. ALPHA 6.5E-006
34. DAMP 0.03
35. END DEFINE MATERIAL
36. MEMBER PROPERTY AMERICAN
37. 17 TO 24 29 TO 32 UPTABLE 1 T-BEAM
38. 1 TO 16 25 TO 28 33 TO 36 UPTABLE 1 R-BEAM
39. CONSTANTS
40. MATERIAL STEEL ALL

```

STAAD SPACE

-- PAGE NO. 2

Page A6
Sht. 6 of 14

- 41. SUPPORTS
- 42. 1 5 17 21 PINNED
- 43. UNIT FEET POUND
- 44. LOAD 1 LOADTYPE DEAD TITLE SELF WEIGHT
- 45. MEMBER LOAD
- 46. 17 TO 24 29 TO 32 UNI GY -6.303
- 47. 1 TO 16 25 TO 28 33 TO 36 UNI GY -4.116
- 48. LOAD 2 LOADTYPE LIVE TITLE LIVE LOAD
- 49. MEMBER LOAD
- 50. 2 4 10 12 25 27 34 36 UNI GY -125
- 51. 1 3 5 7 9 11 13 15 LIN Y 0 -125
- 52. 6 8 14 16 26 28 33 35 LIN Y -125 0
- 53. 18 20 29 31 UNI GY -250
- 54. 17 19 21 23 LIN Y 0 -250
- 55. 22 24 30 32 LIN Y -250 0
- 56. LOAD COMBINATION 3
- 57. 1 1.0 2 1.0
- 58. UNIT INCHES KIP
- 59. PERFORM ANALYSIS

P R O B L E M S T A T I S T I C S

NUMBER OF JOINTS/MEMBER+ELEMENTS/SUPPORTS =	33/	36/	4
ORIGINAL/FINAL BAND-WIDTH=	21/	4/	30 DOF
TOTAL PRIMARY LOAD CASES =	2,	TOTAL DEGREES OF FREEDOM =	186
SIZE OF STIFFNESS MATRIX =	6 DOUBLE KILO-WORDS		
REQRD/AVAIL. DISK SPACE =	12.1/	4930.7 MB	

- 60. PRINT SUPPORT REACTIONS

SUPPORT REACTIONS -UNIT KIP INCH STRUCTURE TYPE = SPACE

JOINT	LOAD	FORCE-X	FORCE-Y	FORCE-Z	MOM-X	MOM-Y	MOM Z
1	1	0.00	0.04	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00
5	1	0.00	0.04	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00
17	1	0.00	0.04	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00
21	1	0.00	0.04	0.00	0.00	0.00	0.00
	2	0.00	1.00	0.00	0.00	0.00	0.00
	3	0.00	1.04	0.00	0.00	0.00	0.00

***** END OF LATEST ANALYSIS RESULT *****

- 61. LOAD LIST 3
- 62. PRINT JOINT DISPLACEMENTS

JOINT DISPLACEMENT (INCH RADIANS) STRUCTURE TYPE = SPACE

JOINT	LOAD	X-TRANS	Y-TRANS	Z-TRANS	X-ROTAN	Y-ROTAN	Z-ROTAN
1	3	0.00000	0.00000	0.00000	0.00116	0.00000	-0.00435
2	3	0.00000	-0.09598	0.00000	0.00084	0.00000	-0.00307
3	3	0.00000	-0.13619	0.00000	0.00052	0.00000	0.00000
4	3	0.00000	-0.09598	0.00000	0.00084	0.00000	0.00307
5	3	0.00000	0.00000	0.00000	0.00116	0.00000	0.00435
6	3	0.00000	-0.01376	0.00000	0.00086	0.00000	-0.00425
7	3	0.00000	-0.14203	0.00000	0.00035	0.00000	0.00000
8	3	0.00000	-0.01376	0.00000	0.00086	0.00000	0.00425
9	3	0.00000	-0.02027	0.00000	0.00000	0.00000	-0.00414
10	3	0.00000	-0.10984	0.00000	0.00000	0.00000	-0.00278
11	3	0.00000	-0.14433	0.00000	0.00000	0.00000	0.00000
12	3	0.00000	-0.10984	0.00000	0.00000	0.00000	0.00278
13	3	0.00000	-0.02027	0.00000	0.00000	0.00000	0.00414
14	3	0.00000	-0.01376	0.00000	-0.00086	0.00000	-0.00425
15	3	0.00000	-0.14203	0.00000	-0.00035	0.00000	0.00000
16	3	0.00000	-0.01376	0.00000	-0.00086	0.00000	0.00425
17	3	0.00000	0.00000	0.00000	-0.00116	0.00000	-0.00435
18	3	0.00000	-0.09598	0.00000	-0.00084	0.00000	-0.00307
19	3	0.00000	-0.13619	0.00000	-0.00052	0.00000	0.00000
20	3	0.00000	-0.09598	0.00000	-0.00084	0.00000	0.00307
21	3	0.00000	0.00000	0.00000	-0.00116	0.00000	0.00435
22	3	0.00000	-0.05201	0.00000	0.00100	0.00000	-0.00401
23	3	0.00000	-0.12549	0.00000	0.00068	0.00000	-0.00168
24	3	0.00000	-0.12549	0.00000	0.00068	0.00000	0.00168
25	3	0.00000	-0.05201	0.00000	0.00100	0.00000	0.00401
26	3	0.00000	-0.06942	0.00000	0.00000	0.00000	-0.00376
27	3	0.00000	-0.13569	0.00000	0.00000	0.00000	-0.00144
28	3	0.00000	-0.13569	0.00000	0.00000	0.00000	0.00144
29	3	0.00000	-0.06942	0.00000	0.00000	0.00000	0.00376
30	3	0.00000	-0.05201	0.00000	-0.00100	0.00000	-0.00401
31	3	0.00000	-0.12549	0.00000	-0.00068	0.00000	-0.00168
32	3	0.00000	-0.12549	0.00000	-0.00068	0.00000	0.00168
33	3	0.00000	-0.05201	0.00000	-0.00100	0.00000	0.00401

***** END OF LATEST ANALYSIS RESULT *****

63. PRINT MEMBER FORCES

MEMBER END FORCES STRUCTURE TYPE = SPACE

ALL UNITS ARE -- KIP INCH (LOCAL)

MEMBER	LOAD	JT	AXIAL	SHEAR-Y	SHEAR-Z	TORSION	MOM-Y	MOM-Z
1	3	1	0.00	0.54	0.00	0.15	0.00	0.09
		22	0.00	-0.48	0.00	-0.15	0.00	6.16
2	3	2	0.00	0.35	0.00	0.15	0.00	-11.11
		23	0.00	-0.22	0.00	-0.15	0.00	14.52
3	3	3	0.00	-0.15	0.00	-0.15	0.00	-16.63
		24	0.00	0.22	0.00	0.15	0.00	14.52
4	3	4	0.00	-0.35	0.00	-0.15	0.00	-11.11
		25	0.00	0.48	0.00	0.15	0.00	6.16
5	3	5	0.00	0.50	0.00	0.09	0.00	0.15
		8	0.00	-0.43	0.00	-0.09	0.00	5.57
6	3	8	0.00	0.43	0.00	0.09	0.00	-5.57
		13	0.00	-0.37	0.00	-0.09	0.00	10.24
7	3	13	0.00	-0.37	0.00	-0.09	0.00	-10.24
		16	0.00	0.43	0.00	0.09	0.00	5.57
8	3	16	0.00	-0.43	0.00	-0.09	0.00	-5.57
		21	0.00	0.50	0.00	0.09	0.00	-0.15
9	3	21	0.00	0.54	0.00	0.15	0.00	0.09
		33	0.00	-0.48	0.00	-0.15	0.00	6.16
10	3	20	0.00	0.35	0.00	0.15	0.00	-11.11
		32	0.00	-0.22	0.00	-0.15	0.00	14.52
11	3	19	0.00	-0.15	0.00	-0.15	0.00	-16.63
		31	0.00	0.22	0.00	0.15	0.00	14.52
12	3	18	0.00	-0.35	0.00	-0.15	0.00	-11.11
		30	0.00	0.48	0.00	0.15	0.00	6.16
13	3	17	0.00	0.50	0.00	0.09	0.00	0.15
		14	0.00	-0.43	0.00	-0.09	0.00	5.57
14	3	14	0.00	0.43	0.00	0.09	0.00	-5.57
		9	0.00	-0.37	0.00	-0.09	0.00	10.24
15	3	9	0.00	-0.37	0.00	-0.09	0.00	-10.24
		6	0.00	0.43	0.00	0.09	0.00	5.57

MEMBER END FORCES STRUCTURE TYPE = SPACE

ALL UNITS ARE -- KIP INCH (LOCAL)

MEMBER	LOAD	JT	AXIAL	SHEAR-Y	SHEAR-Z	TORSION	MOM-Y	MOM-Z
16	3	6	0.00	-0.43	0.00	-0.09	0.00	-5.57
		1	0.00	0.50	0.00	0.09	0.00	-0.15
17	3	9	0.00	0.73	0.00	0.00	0.00	-0.19
		26	0.00	-0.60	0.00	0.00	0.00	8.44
18	3	10	0.00	0.35	0.00	0.00	0.00	-14.12
		27	0.00	-0.09	0.00	0.00	0.00	16.72
19	3	11	0.00	0.04	0.00	0.00	0.00	-16.75
		28	0.00	0.09	0.00	0.00	0.00	16.72
20	3	12	0.00	-0.35	0.00	0.00	0.00	-14.12
		29	0.00	0.60	0.00	0.00	0.00	8.44
21	3	3	0.00	0.31	0.00	0.00	0.00	-0.30
		7	0.00	-0.17	0.00	0.00	0.00	3.42
22	3	7	0.00	0.17	0.00	0.00	0.00	-3.42
		11	0.00	-0.04	0.00	0.00	0.00	4.47
23	3	11	0.00	-0.04	0.00	0.00	0.00	-4.47
		15	0.00	0.17	0.00	0.00	0.00	3.42
24	3	15	0.00	-0.17	0.00	0.00	0.00	-3.42
		19	0.00	0.31	0.00	0.00	0.00	0.30
25	3	22	0.00	0.48	0.00	0.15	0.00	-6.16
		2	0.00	-0.35	0.00	-0.15	0.00	11.11
26	3	23	0.00	0.22	0.00	0.15	0.00	-14.52
		3	0.00	-0.15	0.00	-0.15	0.00	16.63
27	3	24	0.00	-0.22	0.00	-0.15	0.00	-14.52
		4	0.00	0.35	0.00	0.15	0.00	11.11
28	3	25	0.00	-0.48	0.00	-0.15	0.00	-6.16
		5	0.00	0.54	0.00	0.15	0.00	-0.09
29	3	26	0.00	0.60	0.00	0.00	0.00	-8.44
		10	0.00	-0.35	0.00	0.00	0.00	14.12
30	3	27	0.00	0.09	0.00	0.00	0.00	-16.72
		11	0.00	0.04	0.00	0.00	0.00	16.75
31	3	28	0.00	-0.09	0.00	0.00	0.00	-16.72
		12	0.00	0.35	0.00	0.00	0.00	14.12

Page All
Sht. 11 of 14

MEMBER END FORCES STRUCTURE TYPE = SPACE

ALL UNITS ARE -- KIP INCH (LOCAL)

MEMBER	LOAD	JT	AXIAL	SHEAR-Y	SHEAR-Z	TORSION	MOM-Y	MOM-Z
32	3	29	0.00	-0.60	0.00	0.00	0.00	-8.44
		13	0.00	0.73	0.00	0.00	0.00	0.19
33	3	30	0.00	-0.48	0.00	-0.15	0.00	-6.16
		17	0.00	0.54	0.00	0.15	0.00	-0.09
34	3	31	0.00	-0.22	0.00	-0.15	0.00	-14.52
		18	0.00	0.35	0.00	0.15	0.00	11.11
35	3	32	0.00	0.22	0.00	0.15	0.00	-14.52
		19	0.00	-0.15	0.00	-0.15	0.00	16.63
36	3	33	0.00	0.48	0.00	0.15	0.00	-6.16
		20	0.00	-0.35	0.00	-0.15	0.00	11.11

***** END OF LATEST ANALYSIS RESULT *****

64. PRINT MEMBER STRESSES

MEMBER STRESSES

ALL UNITS ARE KIP /SQ INCH

MEMB	LD	SECT	AXIAL	BEND-Y	BEND-Z	COMBINED	SHEAR-Y	SHEAR-Z
1	3	.0	0.0	0.0	0.1	0.1	1.1	0.0
		1.00	0.0	0.0	6.2	6.2	1.0	0.0
2	3	.0	0.0	0.0	11.2	11.2	0.7	0.0
		1.00	0.0	0.0	14.6	14.6	0.5	0.0
3	3	.0	0.0	0.0	16.7	16.7	0.3	0.0
		1.00	0.0	0.0	14.6	14.6	0.5	0.0
4	3	.0	0.0	0.0	11.2	11.2	0.7	0.0
		1.00	0.0	0.0	6.2	6.2	1.0	0.0
5	3	.0	0.0	0.0	0.1	0.1	1.0	0.0
		1.00	0.0	0.0	5.6	5.6	0.9	0.0
6	3	.0	0.0	0.0	5.6	5.6	0.9	0.0
		1.00	0.0	0.0	10.3	10.3	0.8	0.0
7	3	.0	0.0	0.0	10.3	10.3	0.8	0.0
		1.00	0.0	0.0	5.6	5.6	0.9	0.0
8	3	.0	0.0	0.0	5.6	5.6	0.9	0.0
		1.00	0.0	0.0	0.1	0.1	1.0	0.0
9	3	.0	0.0	0.0	0.1	0.1	1.1	0.0
		1.00	0.0	0.0	6.2	6.2	1.0	0.0
10	3	.0	0.0	0.0	11.2	11.2	0.7	0.0
		1.00	0.0	0.0	14.6	14.6	0.5	0.0
11	3	.0	0.0	0.0	16.7	16.7	0.3	0.0
		1.00	0.0	0.0	14.6	14.6	0.5	0.0
12	3	.0	0.0	0.0	11.2	11.2	0.7	0.0
		1.00	0.0	0.0	6.2	6.2	1.0	0.0
13	3	.0	0.0	0.0	0.1	0.1	1.0	0.0
		1.00	0.0	0.0	5.6	5.6	0.9	0.0
14	3	.0	0.0	0.0	5.6	5.6	0.9	0.0
		1.00	0.0	0.0	10.3	10.3	0.8	0.0
15	3	.0	0.0	0.0	10.3	10.3	0.8	0.0
		1.00	0.0	0.0	5.6	5.6	0.9	0.0
16	3	.0	0.0	0.0	5.6	5.6	0.9	0.0
		1.00	0.0	0.0	0.1	0.1	1.0	0.0
17	3	.0	0.0	0.0	0.2	0.2	1.0	0.0
		1.00	0.0	0.0	7.9	7.9	0.8	0.0

MEMBER STRESSES

ALL UNITS ARE KIP /SQ INCH

MEMB	LD	SECT	AXIAL	BEND-Y	BEND-Z	COMBINED	SHEAR-Y	SHEAR-Z
18	3	.0	0.0	0.0	13.3	13.3	0.5	0.0
		1.00	0.0	0.0	15.7	15.7	0.1	0.0
19	3	.0	0.0	0.0	15.7	15.7	0.1	0.0
		1.00	0.0	0.0	15.7	15.7	0.1	0.0
20	3	.0	0.0	0.0	13.3	13.3	0.5	0.0
		1.00	0.0	0.0	7.9	7.9	0.8	0.0
21	3	.0	0.0	0.0	0.3	0.3	0.4	0.0
		1.00	0.0	0.0	3.2	3.2	0.2	0.0
22	3	.0	0.0	0.0	3.2	3.2	0.2	0.0
		1.00	0.0	0.0	4.2	4.2	0.1	0.0
23	3	.0	0.0	0.0	4.2	4.2	0.1	0.0
		1.00	0.0	0.0	3.2	3.2	0.2	0.0
24	3	.0	0.0	0.0	3.2	3.2	0.2	0.0
		1.00	0.0	0.0	0.3	0.3	0.4	0.0
25	3	.0	0.0	0.0	6.2	6.2	1.0	0.0
		1.00	0.0	0.0	11.2	11.2	0.7	0.0
26	3	.0	0.0	0.0	14.6	14.6	0.5	0.0
		1.00	0.0	0.0	16.7	16.7	0.3	0.0
27	3	.0	0.0	0.0	14.6	14.6	0.5	0.0
		1.00	0.0	0.0	11.2	11.2	0.7	0.0
28	3	.0	0.0	0.0	6.2	6.2	1.0	0.0
		1.00	0.0	0.0	0.1	0.1	1.1	0.0
29	3	.0	0.0	0.0	7.9	7.9	0.8	0.0
		1.00	0.0	0.0	13.3	13.3	0.5	0.0
30	3	.0	0.0	0.0	15.7	15.7	0.1	0.0
		1.00	0.0	0.0	15.7	15.7	0.1	0.0
31	3	.0	0.0	0.0	15.7	15.7	0.1	0.0
		1.00	0.0	0.0	13.3	13.3	0.5	0.0
32	3	.0	0.0	0.0	7.9	7.9	0.8	0.0
		1.00	0.0	0.0	0.2	0.2	1.0	0.0
33	3	.0	0.0	0.0	6.2	6.2	1.0	0.0
		1.00	0.0	0.0	0.1	0.1	1.1	0.0
34	3	.0	0.0	0.0	14.6	14.6	0.5	0.0
		1.00	0.0	0.0	11.2	11.2	0.7	0.0

MEMBER STRESSES

ALL UNITS ARE KIP /SQ INCH

MEMB	LD	SECT	AXIAL	BEND-Y	BEND-Z	COMBINED	SHEAR-Y	SHEAR-Z
35	3	.0	0.0	0.0	14.6	14.6	0.5	0.0
		1.00	0.0	0.0	16.7	16.7	0.3	0.0
36	3	.0	0.0	0.0	6.2	6.2	1.0	0.0
		1.00	0.0	0.0	11.2	11.2	0.7	0.0

***** END OF LATEST ANALYSIS RESULT *****

65. FINISH

***** END OF THE STAAD.Pro RUN *****

**** DATE= JAN 22,2007 TIME= 16:52:22 ****